

P3+WH PRO

THE LEDTEK PROFESSIONAL LEAGUE

The LEDTEK PRO-series is a generation of LED walls that convinces with its system concept and combines a simple design with an easy, efficient and safe assembly.

The TÜV-approved Tri-Frame system with its different installation options for indoor and outdoor use makes it possible to work without time-consuming piping. Without losing stability or safety, it allows for constructions of up to 8m in height (outdoors) and 10m indoors.

The P3+WH PRO becomes part of the series that has so far consisted of the P4+WH PRO (outdoor) and the P2+BL PRO (indoor) and is now complemented by an outdoor product that is also perfectly suitable for indoor use.

Because of its IP code of 65, the new wall is equipped to defy all kinds of environmental influences. The pixel pitch of 3.91mm with a resolution of 256x256px/m² promises a sharp image that is topped off by a luminosity of 3,900 Nits and 16.7 million display colours. With a refresh rate of 3,840 Hz and a scan rate of 1/8 it is particularly suitable for camera shots. The P3+WH PRO is equipped with the A10s PRO receiving card by NovaStar. The best technology on the market is therefore installed, which promises a high level of future security. Compatible with all controllers in the COEX-series.

Areas of application

- Concerts and festivals
- Sport events
- Public Viewing
- Suitable for indoor events



Special features and advantages

- Brilliant picture and colour quality
- Static proof and test book (EN-13814)
- Unbeatable price-performance ratio
- Articles in stock
- Rental Pool
- 3-year LEDTEK guarantee
- Over 15 years of experience and know-how

Certifications of the PRO-series

ROHS / CE

EMV Prüfbericht: AE50425582;

NSpRL Prüfbericht: AN50499148

PhotoBioSi Prüfbericht (EN-62471):

68.140.20.0182.01

TÜV-certification: ID 1111250394




Bauart geprüft
Sicherheit
Regelmäßige
Produktions-
überwachung



www.tuv.com
ID 1111250394

Cabinet size


LEDTEK P3+WH PRO

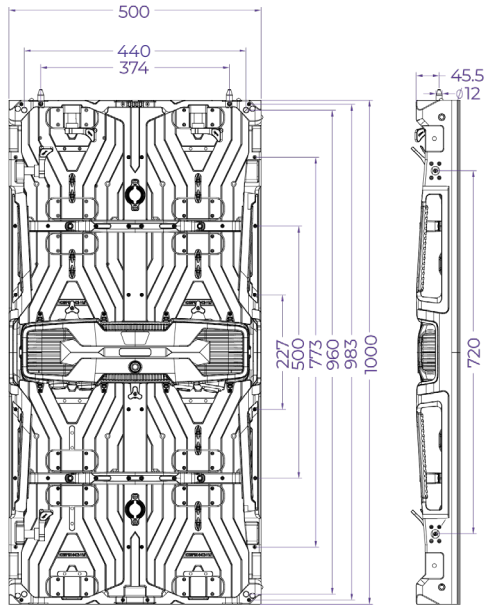

More at ledtek.de/PRO_CAD.zip



LEDTEK P3+sWH PRO

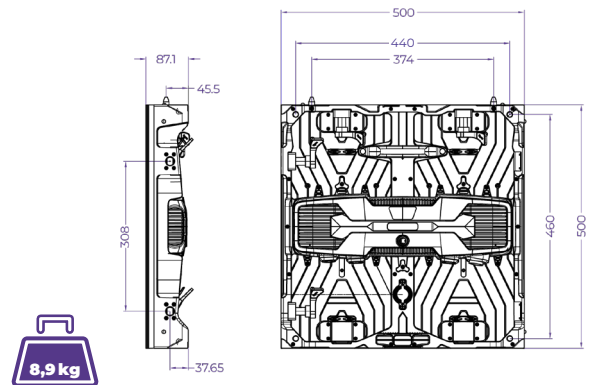

Cabinet features

Pixel pitch	3.91mm
LED type	SMD 1921 (Blackface)
SMD type (RGB)	SY-ADB1921-H
Resolution in pixel/m ²	256 x 256 px (WxH)
Number of pixel/ m ²	65,536 px/m ²
Scanrate	1/8 scan
Luminosity	≤ 4.100 Nits
Display colours	16.7 Mio
Contrast ratio	5.000:1
Image refresh rate	7.680 Hz (CFD555IC)
Receiving card	NovaStar A10s PRO
Power consumption	≤ 700 Watt/m ²
IP code	IP 65
Horizontal	140°
Vertical	120°
Viewing distance	≥ 5m

**Click here
for the
manual:**



**Click here
for the
PRO mediakit:**



Further information and data (e.g. tender texts, user manuals, RCFGX files) can be found in the media kit.

If you have any questions, please contact us on **+49 551 492 493 44** or by email at vertrieb@ledtek.de